





FTP GENERAL TRADING L.L.C

Catalog Luxury Windows - ALU

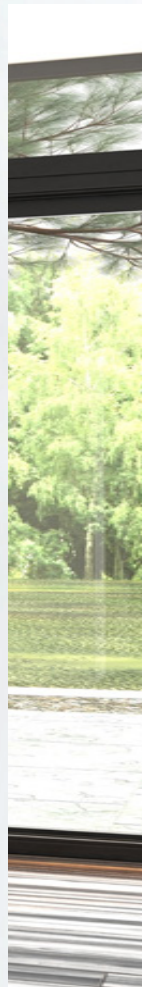

FTP GENERAL TRADING L.L.C

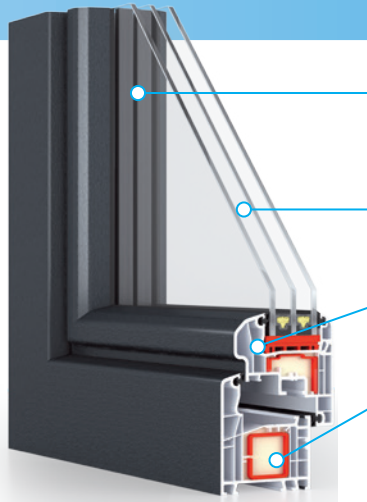

Ideal 4000 Round Line Spacer

TGI
> Low thermal conductivity, resulting in excellent insulation performance.

Triple glazing

> A thermal insulation coefficient of $U_g=0.7 \text{ W/m}^2\text{K}$

5-chamber system

> 70mm depth of installation, excellent thermal insulation

Thermique+

> Injection of polyurethane foam into main chambers with reinforcements, ensuring better thermal insulation.




Ideal 4000 classic

A different design from the ideal 4000 Round line, a straighter shape with the same thermal properties.

INNOVATION
 $U_w = 0,83 \text{ W/m}^2\text{K}$
10 Years Warranty

Centered handle window

The centered handle significantly improves the appearance of the window on the interior side and allows for more natural light, with a slim 126mm mudntin. Available only on the Ideal 4000 Round Line





NOUVEAUTÉ 2017

Invisible welding in the corners for added aesthetics



"Renovation" Window

The renovation type window system is made with interior overlapping wings that hide the old frame.



New construction window

Monobloc frame with overlapping wing
Isolation : 100 - 120 - 140 - 160



Reinforced secondary sash locking system

NEW PRODUCTS



Window CKTech

3-seal system for improved waterproofing.

Frame: 70 mm - 7 chambers

Sash: 90 mm - 8 chambers

Standard thermal performance up to

$U_w 0,6 \text{ W/m}^2\text{K}$

Thermally reinforced insulated glazing


Injected polyurethane foam

Invisible welding in the corners
2 additional anti-burglary locking points.




PVC Sliding Door

They combine the technical and thermal benefits of windows or doors. The main sash pivots and slides in front of the fixed part. It is equipped with several locking points for perfect security.

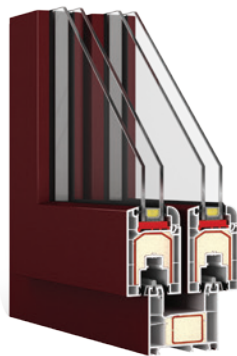

2-Sash PVC Sliding Door

In this sliding door, the two sashes slide on two parallel tracks. For perfect waterproofing, each sash is equipped with a brush seal and several locking points.

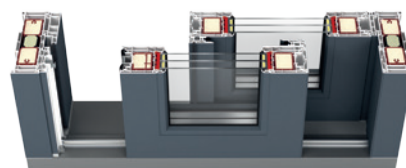

Lift PVC Sliding Door


HST door with 2 sliding tracks, they allow for maximum constructions up to 3 meters per sash.



PVC Balcony Door

The balcony door is a French door with an aluminum threshold and 5-point lock. It provides easy access from the inside to the outside with maximum security and perfect waterproofing.

INNOVATION
 $UW = 0,83 \text{ W/m}^2 \cdot \text{K}$
 20 Year
 Warranty

Thermally reinforced glazing 
 Injected polyurethane foam
 Invisible welding in the corners



CSTB
le futur en construction

aliplast



Window ALU "Imperial"

Aliplast profile.

Dormant depth : 65 mm

Thermal performance up to :

UW 0,9 W/m².K



Window ALU "Ecofutural"

Aliplast profile.

Dormant depth : 65 mm

Thermal performance up to :

UW 0,8 W/m².K



Windows ALU Hidden opening


Possibility of hidden opening for more brightness

Aliplast profile.

Dormant depth : 65 mm

Thermal performance up to :

UW 0,8 W/m².K

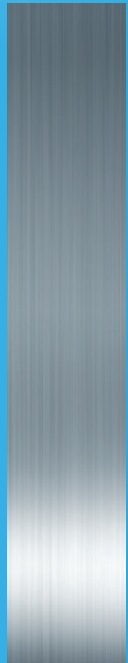



Sliding Door ALU "Modern slide"

Aliplast profile with thermal break in the dormant and opening. Thin profile.

Central post of 42 mm for more glazing.

A standard thermal performance up to:

$UW 1,1 W/m^2.K$



Sliding Door ALU "Visio glide"

Thin profile. The Aliplast profile is very rigid, allowing for large constructions that can reach 400 kg.

Perfect thermal and acoustic insulation thanks to its EPDM seals.

Standard thermal performance up to :

$UW 1,2 W/m^2.K$



Sliding Door ALU "Cor-vision"

The Cor-vision profile has a very thin central frame of 20mm, providing an elegant and streamlined appearance.

The thinnest on the aluminum carpentry market.

A standard thermal performance up to:

$UW 1,1 W/m^2.K$



The possibility of a flush threshold on the entire range



CSTB
le futur en construction

aliplast



Pivot Sliding Door ALU "Imperial"

The Aliplast profile.
The sliding is the best insulation of sliding doors thanks to its identical window closure system.
Thermal performance up to:

UW 0,9 W/m² .K



ALU Accordion Door

Aliplast profile.
Our system allows for the consideration of large widths of passage and opening. Thanks to profiles with a lesser thickness, the construction has a lighter appearance and leaves room for light.

Thermal performance up to:

UW 1,3 W/m² .K



Sliding ALU with Pocket Door

The Aliplast profile.
Designed for new construction and renovation, this system provides more space and light.


Thermal performance up to:

UW 1,3 W/m² .K

1 leaf on 1 rail
(up to 2.60 m wide)



2 leaves on 1 rail
(up to 4.60 m wide)



2 leaves on 2 rail
(up to 4 m wide)



4 leaves on 2 rail
(up to 5 m wide)





Traditional component

For carpentry box or tunnel box, designed for quick and easy assembly.

CSTB
le futur en construction



Renovation component

Aluminum casing, comes in 3 shapes : cut-pan, quarter round, half round. Casing of 137, 150, 165 or 180 mm.



One-piece rounded shutter


PVC box with polystyrene for perfect thermal insulation. Rounded box for more aesthetics.

Available in 170 and 210mm.



Square one-piece roller shutter

PVC box with polystyrene for perfect thermal insulation. Available in 170 and 210mm.



Renova range one-piece shutter

The Rénova system is a one-piece box with a renovation wing around it for a perfect finish.

somfy.

LIANDA

All our shutters can be equipped with integrated mosquito nets



www.ftp-gt.com

FTP GENERAL TRADING L.L.C

 www.ftp-gt.com

 +971 45 85 73 31

 info@ftp-gt.com